



# Blackberry Curve 8320 Front Panel Replacement

This guide explains the disassembly of the Blackberry Curve 8320 to replace the front panel.

Written By: Christopher Aiello



## INTRODUCTION

This guide will show you how to:

- Remove the battery
- Remove the front cover
- Replace the front panel



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- ❗ Hold the phone with the back facing you.
- Press the silver tab down and remove the cover.

## Step 2



- Pull up on the top edge of the battery to remove it.




### Step 3 — Front Panel



- Use a plastic opening tool to gently pry the bottom cover loose.
- ⚠ Do not use excessive force at risk of damaging the antenna, which is under this casing.
- Pull the cover from the front of the phone after the back is loose.


### Step 4

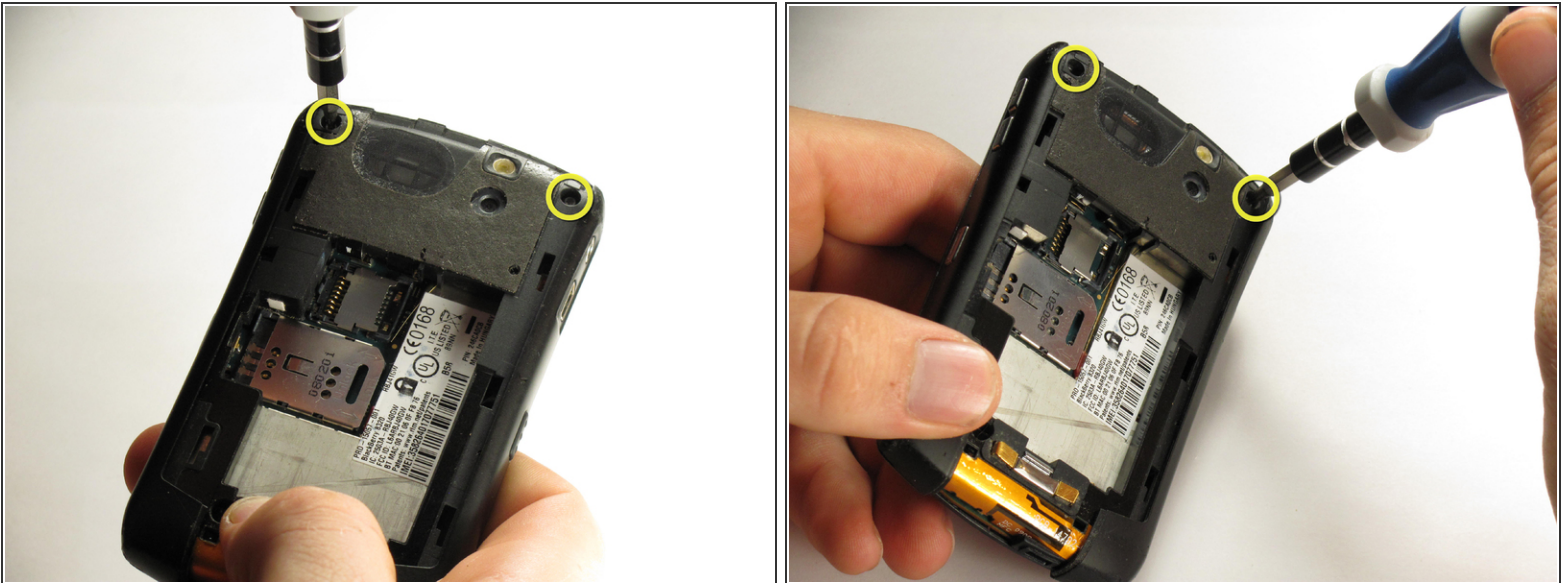

- Remove the two top screws with a T5 Torx screwdriver.

**i** The screws are 8mm long.


## Step 5

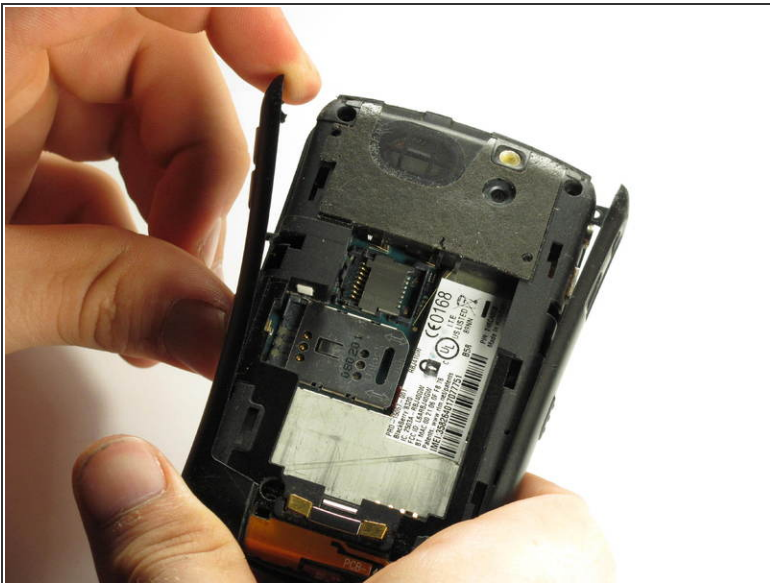

- Gently pry off the top of the side casings.

⚠ The side casings cannot be fully removed yet because they are screwed on at the bottom.

## Step 6

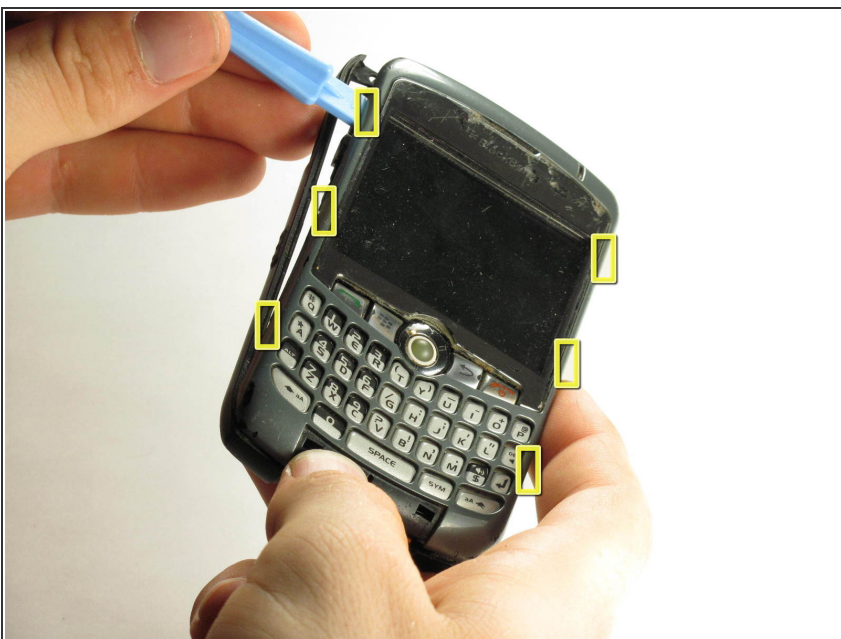

- Use a plastic opening tool to detach the securing clips holding the the front panel in place.

ⓘ There are six securing clips total.

## Step 7



- Remove the front panel.

**i** You may need to apply some force because the front panel is attached to the rest of the device with adhesive.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 01:16:57 AM.